



INSTALLATION GUIDE

SIMBOOTH 2

TABLE OF CONTENTS

Parts list 1-2

Structure installation 3-7

Floor installation 8-9



PARTS LIST

WALL PANELS


RIGHT WALLS



LEFT WALLS




FLOOR PANELS

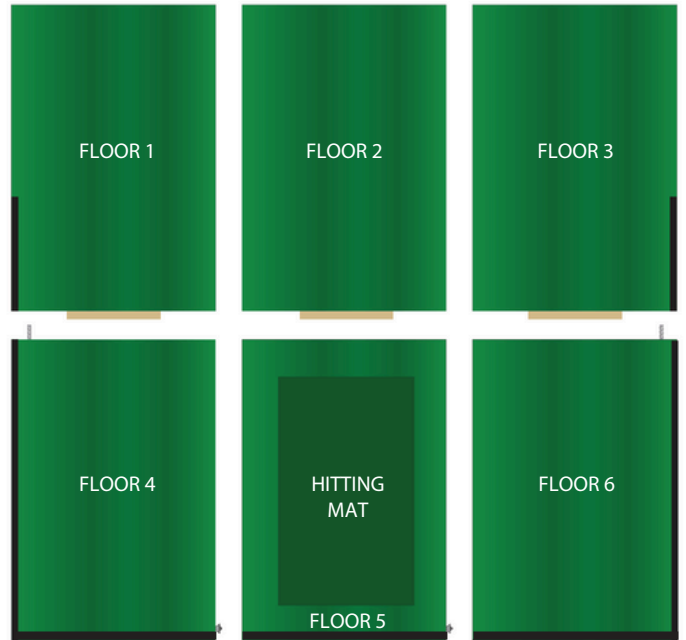

CEILING PANELS

BACK CEILINGS

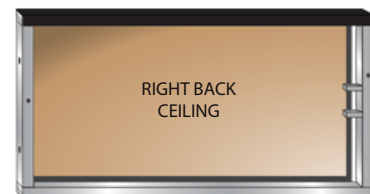

FRONT CEILINGS



PARTS LIST

ACCESSORIES

Bolts full threads



3-1/2" (10x)

Washer (42x)



Nuts (32x)



Hitting mat



Black impact screen



Ceiling truss (2x)



Wing Nuts (4x)



White screen



Tees (10x)



Bolt



2" (4x)


END OF PARTS LIST

BEFORE STARTING

You will need 4 people, 2 ladders, a screwdriver and 1/2 wrench.


1

Fix the left top wall to the left front ceiling with the nuts.

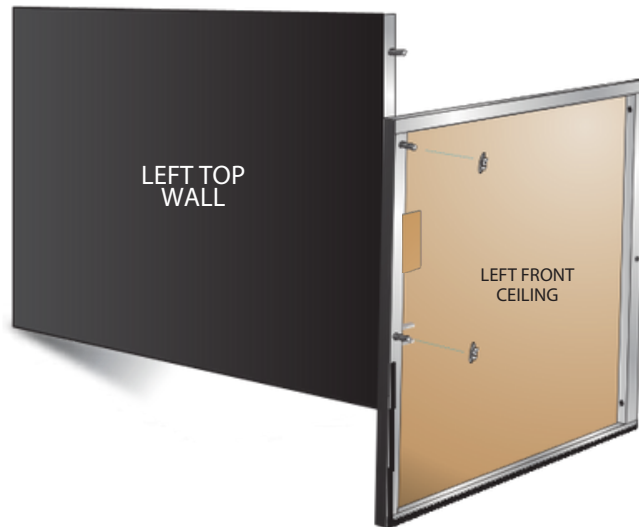

2

Using the nuts, fix the center front ceiling to the left front ceiling, then fix the right front ceiling to the center front ceiling.



3

Using the nuts, fix the right front ceiling to the right top wall.

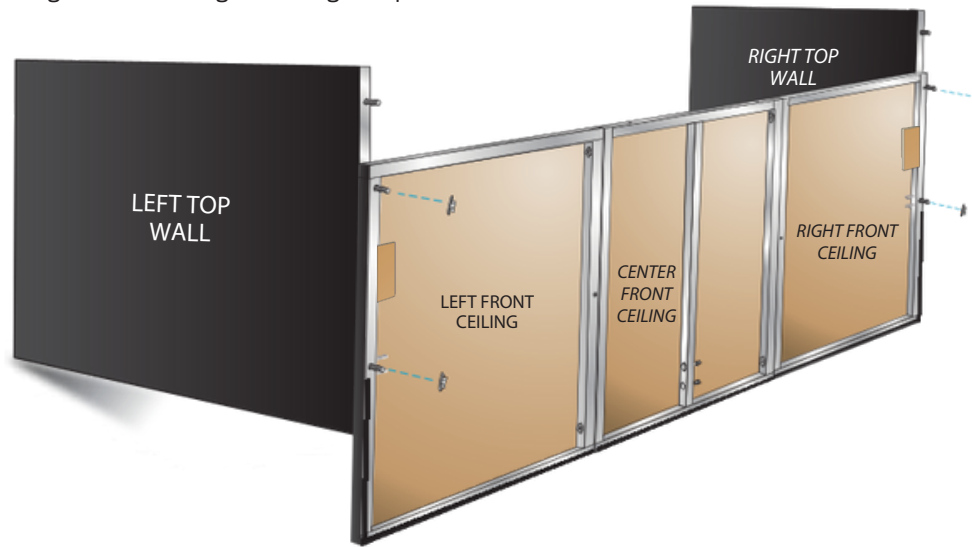

4

Fix both bottom wall panels to the top wall panels with the nuts by removing the bottom wall covers (velcro).




5

Fix the left back ceiling to the left top wall with the nuts.



6

Using the nuts, fix the center back ceiling to the left back ceiling and fix the two center ceilings together.

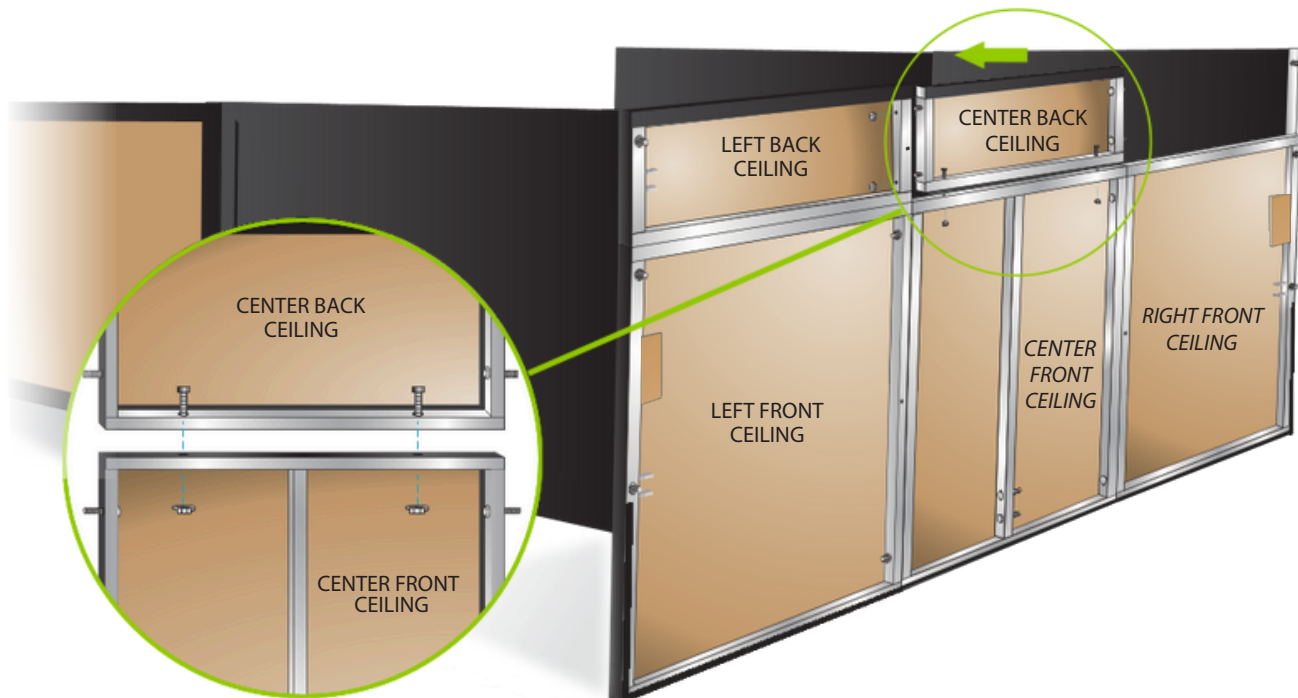

7


Fix the right back ceiling to the center back ceiling and to the right top wall with the nuts.



8

CEILING TRUSS INSTALLATION

Assemble the ceiling trusses with bolts and security pins, then insert them in the back ceiling and the front ceiling.

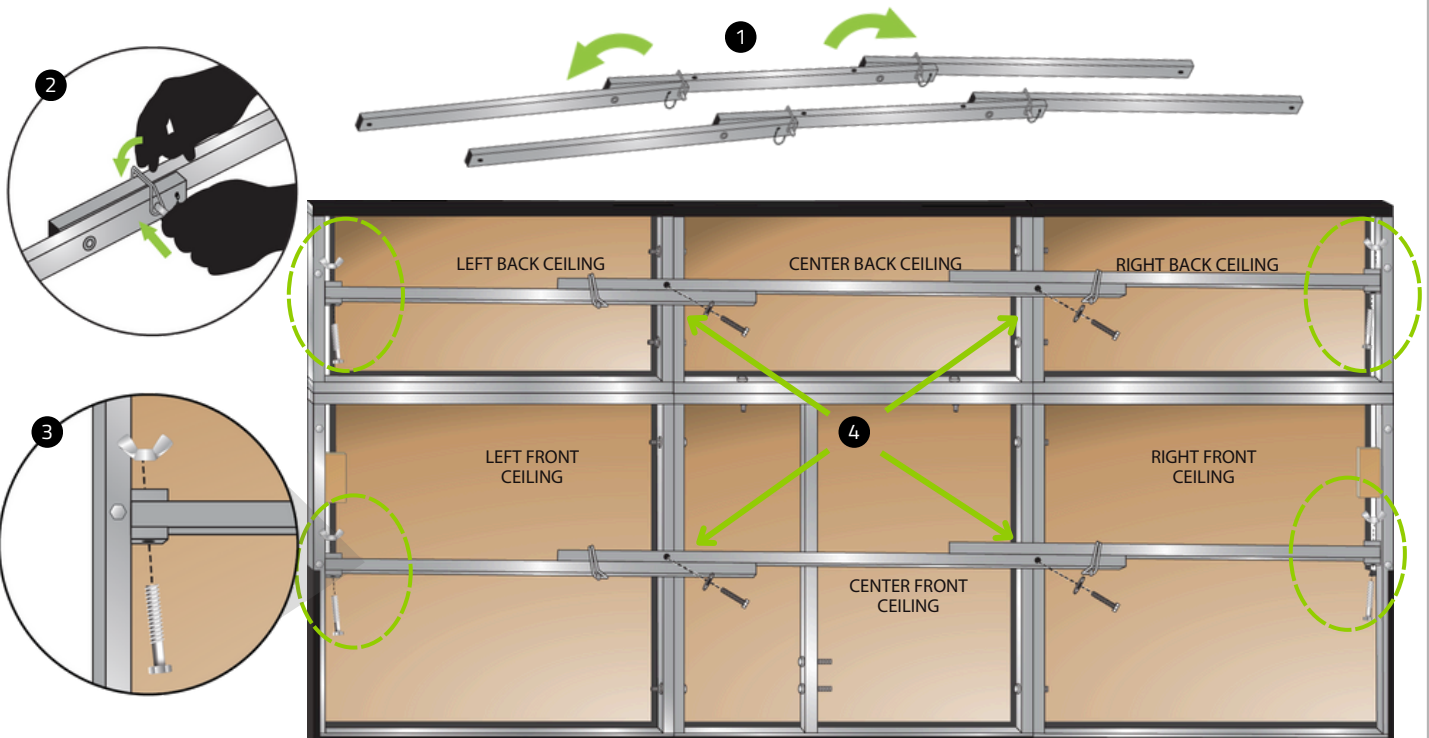

IT IS IMPORTANT TO COMPLETE THIS STEP BEFORE LIFTING THE STRUCTURE.


9

Attach the white screen to the structure.



10

Attach the black netting over the white screen. Make sure it is attached to the top velcro on the ceiling panels and that the bottom doesn't rest on the floor.

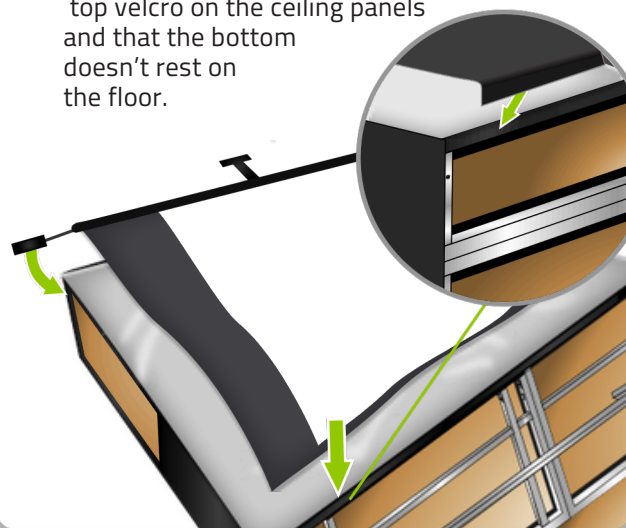

11



Lift the structure with four people.



END OF STRUCTURE INSTALLATION SECTION

1

Install the floor sections in order (1 to 6). A and B you will need bolts washers and nuts. C you will need washers and nuts.

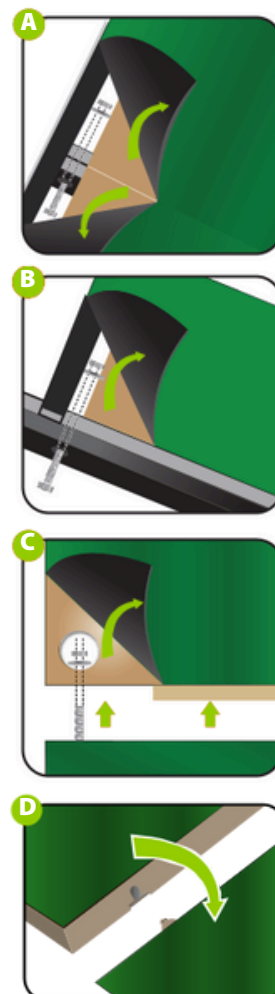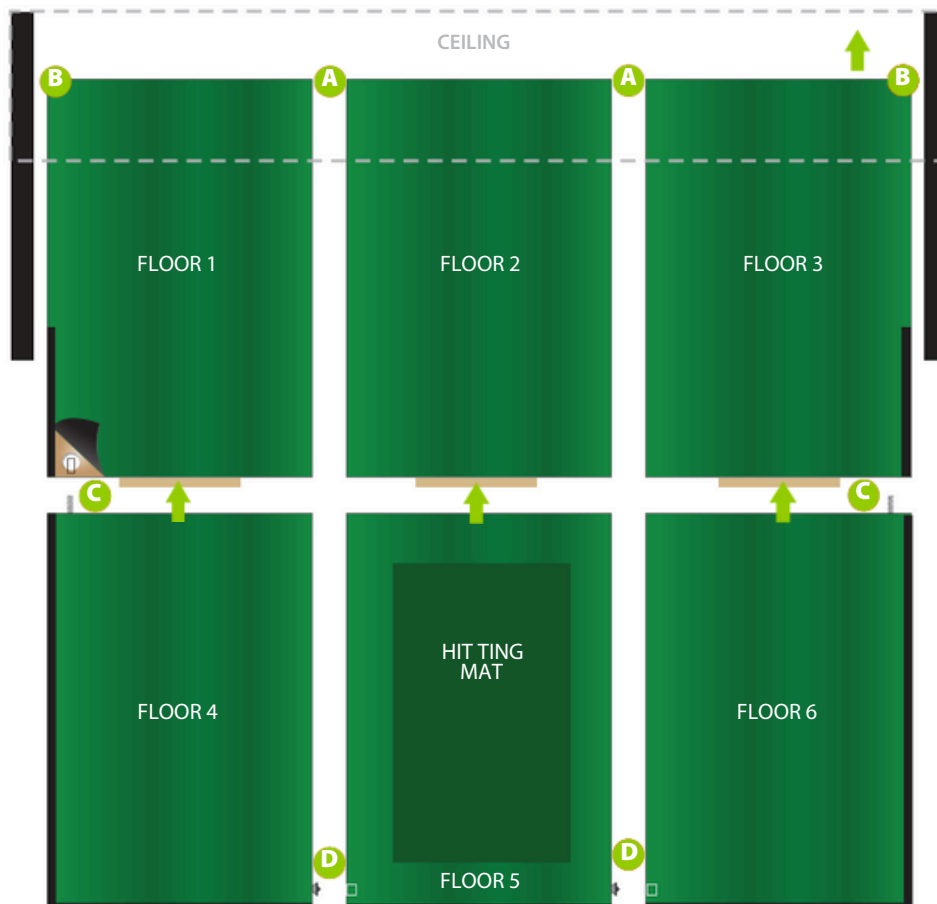

2

Step 1


Lift green carpet.

Step 2

Stretch the white screen behind and under the aluminum bar and reach for it through the space.

Step 3

Fix the screen on half of the velcro on the aluminum bar.

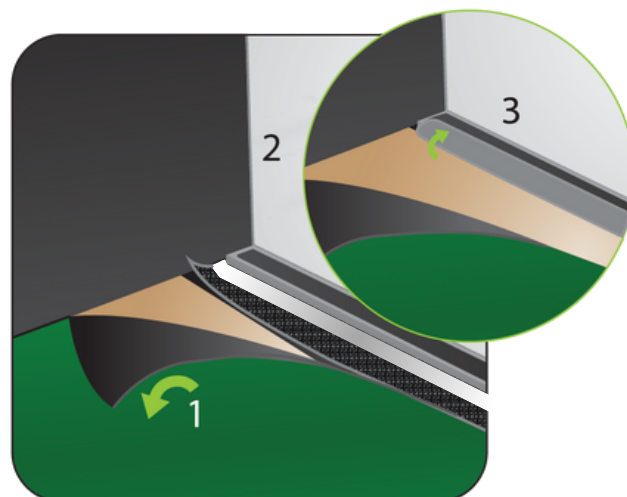

3
Step 1


Lift green carpet.

Step 2

Stretch the white screen behind and under the aluminum bar and reach for it through the space.

Step 3

Stick it on the remaining half of the aluminum bar velcro.

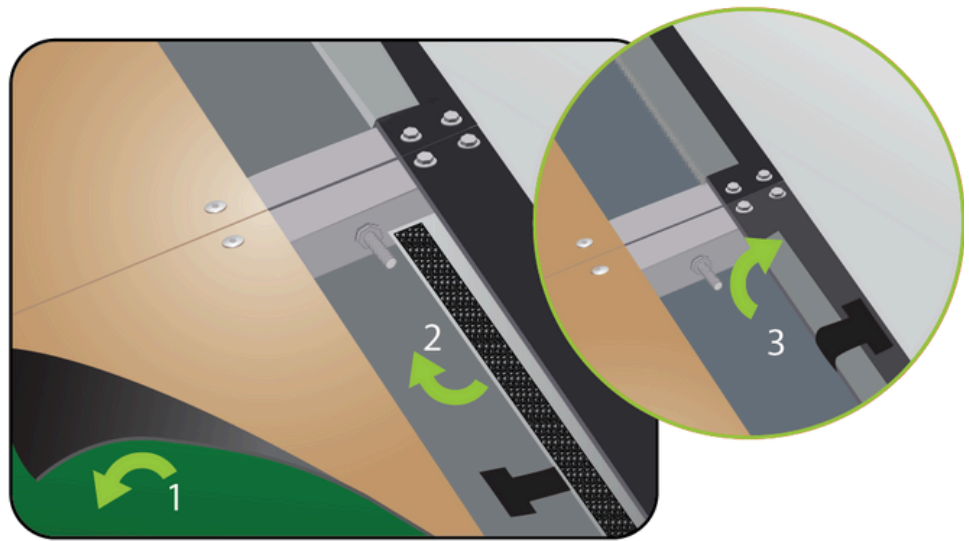

END OF STRUCTURE FLOOR INSTALLATION SECTION